

MX-C04P1 / MX-C08P1

H.264+ SERIES NVR




Key Features

- ◆ Connectable to the Third-Party Network Cameras
- ◆ Up to 8 Network Cameras can be Connected
- ◆ H.264+ Compression Effectively Reduces the Storage Space and Costs by up to 50%
- ◆ Full Channel Recording at up to 4 MP Resolution
- ◆ HDMI/VGA Output at 1080p Resolution
- ◆ 2-ch Playback at 4 MP Resolution or 4-ch at 1080p Resolution
- ◆ 1 SATA Hard Disk can be Connected with 6TB Capacity
- ◆ HDD Quota Management: Different Capacity can be Assigned to Different Channel
- ◆ Supports Line Crossing Detection and Intrusion Detection
- ◆ Smart Search for the Selected Area in the Video; and Smart Playback to Improve the Playback Efficiency
- ◆ One-key Operation: Automatically Search, Modify and add IP Cameras After Device is Activated
- ◆ 100 Mbps Ethernet Network Interface
- ◆ 4/8 Independent 100 Mbps Built-in Switch Network Interfaces

MX-C04P1 / MX-C08P1 Specifications

MODEL		MX-C04P1	MX-C08P1
VIDEO/AUDIO INPUT	IP Video Input	4-ch	8-ch
	Two-Way Audio Input	1-ch, RCA (2.0 Vp-p, 1kΩ)	
NETWORK	Incoming Bandwidth	40 Mbps	60 Mbps
	Outgoing Bandwidth	40 Mbps	40 Mbps
VIDEO/AUDIO OUTPUT	Remote Connection	64	
	Recording Resolution	4 MP/3 MP/1080p/1.3 MP/UXGA/720p/VGA/4CIF /DCIF/2CIF/CIF/QCIF	
	HDMI/VGA Output	1-ch, Resolution: 1920 × 1080/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
	Audio Output	1-ch, RCA (Linear, 1kΩ)	
DECODING	Live View/Playback Resolution	4 MP/3 MP/1080p/1.3 MP /UXGA/720p/VGA/4CIF /DCIF/2CIF/CIF/QCIF	
	Capability	2-ch@4 MP, 4-ch@1080p	
HARD DISK	SATA	1 SATA Interface for 1 HDD	
	Capacity	Up to 6TB for Each Disk	
NETWORK MANAGEMENT	Network Protocols	TCP/IP, DHCP, Morx-Connect, DDNS, NTP, SADP, SMTP, UPnP™	
EXTERNAL INTERFACE	Network Interface	1 RJ-45 10/100 Mbps Self-Adaptive Ethernet Interface	
		4 Independent 100 Mbps Built-in \Switch Network Interfaces	8 Independent 100 Mbps Built-in Switch Network Interfaces
	USB Interface	2 × USB 2.0	
PoE	Interface	4 Independent 100 Mbps PoE Network Interfaces	8 Independent 100 Mbps PoE Network Interfaces
	Max. Power	36 W	75 W
	Supported Standard	AF and AT	
GENERAL	Power Supply	48 VDC	
	Consumption (Without Hard Disk and PoE)	≤10 W	
	Working Temperature	-10 °C to +55 °C (14 °F to 131 °F)	
	Working Humidity	10 % to 90 %	
	Chassis	1U Chassis	
	Dimensions (W × D × H)	200 × 205 × 48 mm (7.9" × 8.1" × 1.9")	285 × 215 × 48 mm (11.2" × 8.5" × 1.9")
	Weight (Without Hard Disk)	< 1 kg (2.2 lb)	

Physical Interfaces

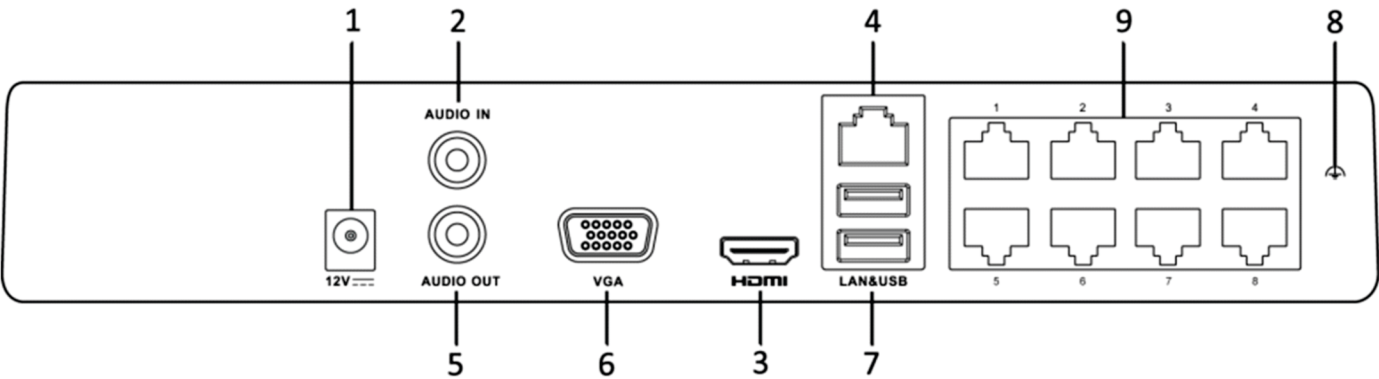

Index	Name	Index	Name
1	Power Supply	6	VGA Interface
2	Audio In	7	USB Interface
3	HDMI Interface	8	Ground
4	LAN Network Interface	9	PoE Ethernet Interface
5	Audio Out		